

# **AP Dynamometer**

The world leader in dynamometers  
since 1937



## **DILLON**

Force Measurement Equipment



# ***Dillon Dynamometer — Nobody does it better!***

Originally designed to measure the tension on telephone wires, the Dynamometer has proven to have limitless versatility as a tension and weight measuring instrument. It is used for such diverse jobs as suspended weighing; mounting cables for bridges; adjusting tension on guy wires; field testing chain, rope, wire—anything requiring precision force or tension measurement.



Utility Lines


## ***Certificate of Calibration***

An official Certificate of Calibration traceable to NIST, dated and signed, accompanies each new or factory serviced Dillon Model AP dynamometer. Experienced technicians calibrate each instrument on an individual basis making certain that all parts are carefully adjusted and that every unit is within stated accuracy tolerances before it leaves the factory.

## ***Popular Applications***



Utility Lines

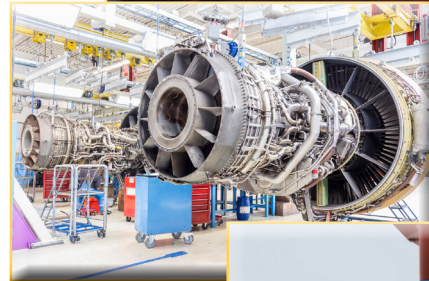

Airplane Engines



Load Monitoring

Dillon is the leader in dynamometers with the largest installed population throughout the world. The sturdy design, top grade components and premium coatings make it last for years in severe environments and applications: the pounding aboard military vehicles and rough handling in field measurements. Embraced by industrial contractors across the globe, we are confident the AP will satisfy your most demanding applications.

## ***Worldwide distribution network***

Dillon supports its customers with a worldwide distribution network. In addition to the US and Canada, we serve fifty-seven other countries. Every Dillon distributor offers application assistance to sales and product support. Their experienced representatives are knowledgeable experts in the force measurement field and can satisfy virtually any need.

# ***Feature for feature — Dillon Dynamometer sets the standard.***

Accuracy:  $\pm 0.5\%$  of full scale capacity for precise data.

Broadest range of capacities and resolutions are certain to fit your needs.

Wide temperature range for use in nearly any environment  
(-50 to 140°F / -45 to 60°C)

Large safety factor for overload protection and long life.

No batteries required.

Dial size choice for the best in portability or visibility.

Anti-parallax dial and pointer produce accurate readings from any perspective.

Maximum hand retains peak load point and is easily reset.

Zero control cancels preset loads (backside).

High strength case resists heavy blows.

Generous shackle openings mate with most hooks and hardware.

High specification materials on all load components. Heat treated to tight tolerances.

Durable powder coat paint provides outstanding protection.

Offset load beam eases tension measurement.

Approvals: CE on all capacities excluding 50K.

ASME b30.26 compliant on 20,000 lb (10,000 kg) and below.



5" (125 mm) diameter AP dynamometer includes a rugged ABS plastic carry case with die-cut foam inserts. Capacities of 30,000 lb (15,000 kg) and above are shipped in a heavy-duty reinforced plywood crate. An optional steel carry case is available for 10" (250 mm) diameter dynamometers up to 20,000 lb (10,000 kg) capacity.



## Options



### Standard Zero positioning

The standard zero position is 9 o'clock for both the 5" and 10" dial sizes. Photo shows a standard position of 9 o'clock.



### Nonstandard Zero positioning

Capacities up to 20,000 lb can be supplied with the zero at 12, 3 or 6. Photo shows a nonstandard position of 12 o'clock.

## Model AP Mechanical Dynamometer Capacities and Increments

### Pound Capacities

5" (125 mm) Dial Size		10" (125 mm) Dial Size	
Part Number	Capacity x Division	Part Number	Capacity x Division
30006-0019	500 x 5	NA	
30006-0027	1000 x 10	30007-0026	1000 x 5
30006-0035	2000 x 20	30007-0034	2000 x 10
30006-0043	4000 x 25	NA	
30006-0050	5000 x 50	30007-0059	5000 x 20
30006-0076	8000 x 50	NA	
30006-0084	10,000 x 100	30007-0083	10,000 x 50
30006-0092	15,000 x 100	NA	
30006-0100	20,000 x 200	30007-0109	20,000 x 100
NA		30784-0017	30,000 x 200
NA		30784-0033	50,000 x 200*

ASME b30.26 compliant on 20,000 lb (10,000 kg) and below.

\*Not CE approved.

### Kilogram Capacities

5" (125 mm) Dial Size		10" (125 mm) Dial Size	
Part Number	Capacity x Division	Part Number	Capacity x Division
30006-0134	500 x 5	NA	
30006-0159	1000 x 10	30007-0158	1000 x 5
30006-0126	2000 x 20	30007-0125	2000 x 10
30006-0167	4000 x 25	NA	
NA		30007-0174	5000 x 20
30006-0118	10,000 x 100	30007-0117	10,000 x 50
NA		30784-0058	20,000 x 100

**Specifications and dimensional details** are available from an authorized Dillon Distributor or the website at [www.dillon-force.com](http://www.dillon-force.com).

Dillon also manufactures highly accurate electronic dynamometers, crane scales and quick-attach tension meters.



# DILLON

Force Measurement Equipment

[www.dynameasure.com](http://www.dynameasure.com)